




# With heat shrink insulator without ferrule

## Round



105° / 600 V / PA-PE / Cu

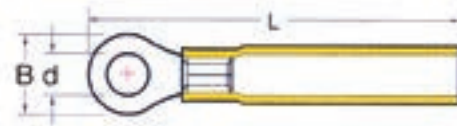

Measurements in mm.

Art.	mm <sup>2</sup> /AWG	d	B	L	
■ SB-15032	0.50-1.50 / 20-16	3.2	5.5	22.2	100/1000
■ SB-15037		3.7	5.5	22.2	
■ SB-15043		4.3	6.6	25.1	
■ SB-15053		5.3	8.0	26.5	
■ SB-15064		6.4	11.6	32.2	
■ SB-15084		8.4	11.6	32.2	
■ SB-15105		10.5	13.7	36.2	
■ SB-25032	1.50-2.50 / 16-14	3.2	6.6	24.9	100/1000
■ SB-25037		3.7	6.6	24.9	
■ SB-25043		4.3	8.5	27.3	
■ SB-25053		5.3	9.5	27.3	
■ SB-25064		6.4	12.0	31.7	
■ SB-25084		8.4	12.0	31.7	
■ SB-25105		10.5	13.7	36.0	
■ SB-55043	4.00-6.00 / 12-10	4.3	7.4	32.0	50/500
■ SB-55053		5.3	9.5	32.7	
■ SB-55064		6.4	12.0	39.0	
■ SB-55084		8.4	15.0	41.2	
■ SB-55105		10.5	15.0	41.2	
■ SB-55130		13.0	19.2	46.0	



## With heat shrink insulator without ferrule

## Forks




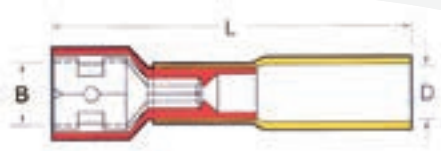






Measurements in mm.

Art.	mm <sup>2</sup> /AWG	d	B	L	
■ SB-15032-A	0.50-1.50 / 20-16	3.2	5.7	26.9	100/1000
■ SB-15037-A		3.7	6.2	26.9	
■ SB-15037-1A		3.7	5.7	26.9	
■ SB-15043-A		4.3	7.2	26.9	
■ SB-15043-1A		4.3	6.4	26.9	
■ SB-15053-A		5.3	8.0	26.9	
■ SB-15064-A		6.4	10.7	27.9	
■ SB-15064-1A		6.4	9.3	27.9	
■ SB-15084-A		8.4	13.5	33.0	
■ SB-15105-A		10.5	15.0	33.4	
■ SB-25032-A	1.50-2.50 / 16-14	3.2	5.7	26.5	100/1000
■ SB-25037-A		3.7	6.2	26.5	
■ SB-25037-1A		3.7	5.7	26.5	
■ SB-25043-A		4.3	7.2	26.5	
■ SB-25043-1A		4.3	6.4	26.5	
■ SB-25053-A		5.3	8.0	26.5	
■ SB-25064-A		6.4	10.7	27.5	
■ SB-25064-1A		6.4	9.3	27.5	
■ SB-25084-A		8.4	13.5	32.6	
■ SB-55032-A	4.00-6.00 / 12-10	3.2	7.3	33.0	50/500
■ SB-55037-A		3.7	8.10	33.0	
■ SB-55037-1A		3.7	6.3	33.0	
■ SB-55043-A		4.3	8.2	33.0	
■ SB-55043-1A		4.3	6.3	33.0	
■ SB-55053-A		5.3	9.0	33.0	
■ SB-55064-A		6.4	12.0	36.5	
■ SB-55064-1A		6.4	9.0	36.5	
■ SB-55084-A		8.4	13.5	38.5	


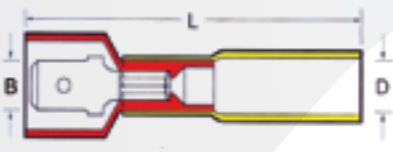






## With heat shrink insulator without ferrule

### Fully insulated female plugs

						
		105° / 300 V / PA-PE / Cu-Zn				
		Measurements in mm.				
Art.	mm <sup>2</sup> /AWG	 	B	D	L	
 <b>SB-15063-3</b>	0.50-1.50 / 20-16	6.3 x 0.8	6.6	6.5	38.5	100/500
 <b>SB-25063-3</b>	1.50-2.50 / 16-14	6.3 x 0.8	6.6	6.5	38.5	100/500
 <b>SB-55063-3</b>	4.00-6.00 / 12-10	6.3 x 0.8	6.6	7.5	40.0	50/500


### Fully insulated male plugs

						
		105° / 300 V / PA-PE / Cu-Zn				
		Measurements in mm.				
Art.	mm <sup>2</sup> /AWG	B	D	L	*	
 <b>SB-15635-3</b>	0.50-1.50 / 20-16	6.3 x 0.8	6.5	40.0	CR-951	100/500
 <b>SB-25635-3</b>	1.50-2.50 / 16-14	6.3 x 0.8	6.5	42.0	CR-952	100/500
 <b>SB-55635-3</b>	4.00-6.00 / 12-10	6.3 x 0.8	7.5	42.5	CR-953	50/500




## With heat shrink insulator without ferrule

### End to end splices

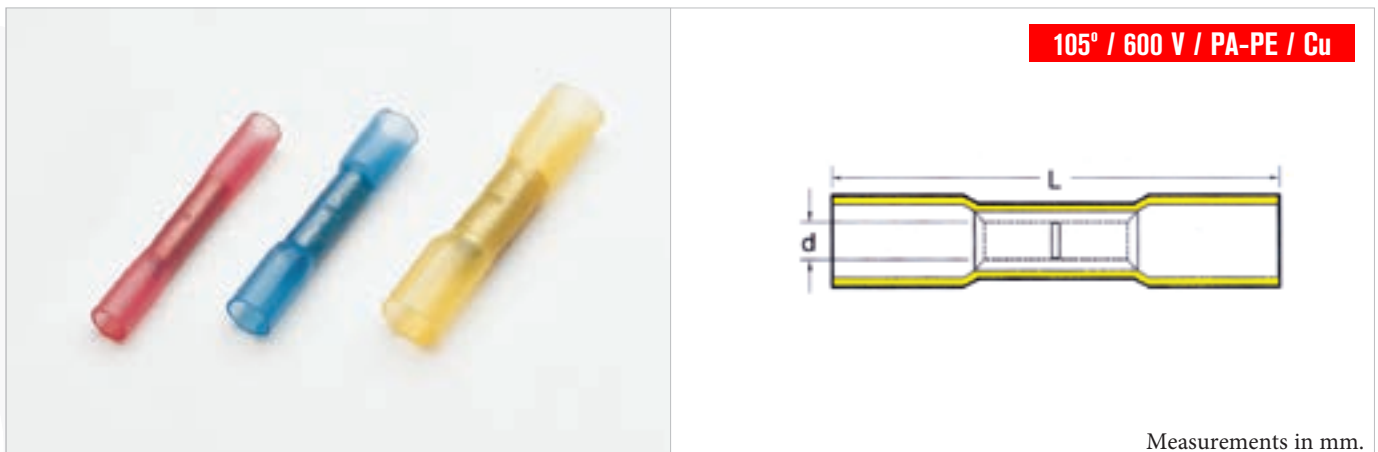

Art.	mm <sup>2</sup> /AWG	d	L	
■ SB-2216	0.50-1.50 / 20-16	2.1	36.0	100/1000
■ SB-2216-T		1.9		
■ SB-1614	1.50-2.50 / 16-14	2.7	36.0	100/500
■ SB-1614-T		2.5		
■ SB-1210	4.00-6.00 / 12-10	4.0	42.0	25/250
■ SB-1210-T		3.6		

### Parallel splices

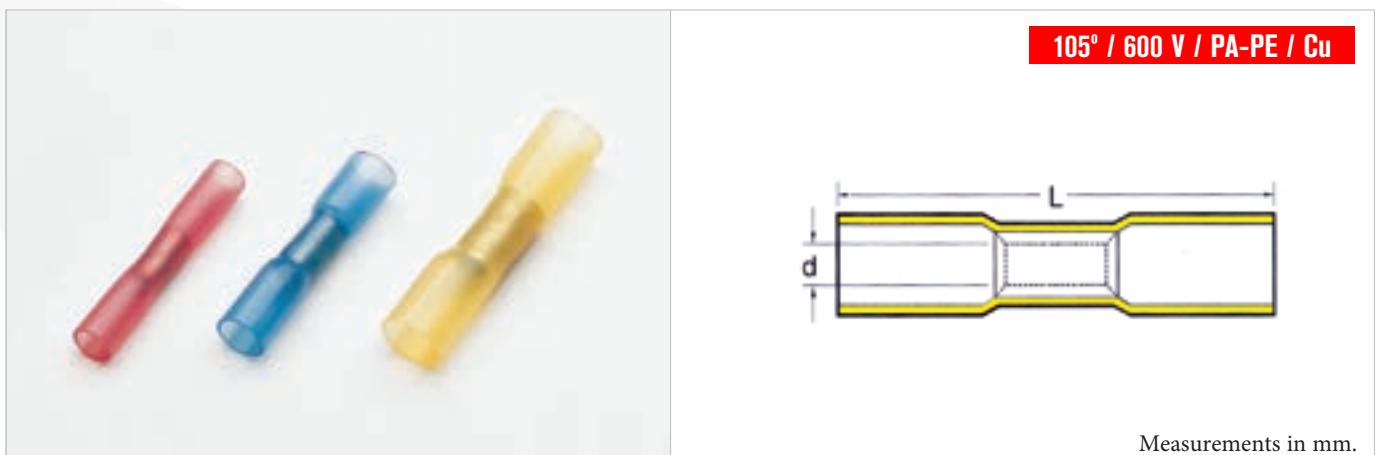

Art.	mm <sup>2</sup> /AWG	d	L	
■ SB-1.25T	0.50-1.50 / 20-16	1.7	35.0	100/1000
■ SB-2T	1.50-2.50 / 16-14	2.4	35.0	100/500
■ SB-5.5T	4.00-6.00 / 12-10	3.6	35.0	25/250